


THERMOSTATS

Convactor Thermostats for Flush Mounting

TC1
+ 6°C to + 30°C

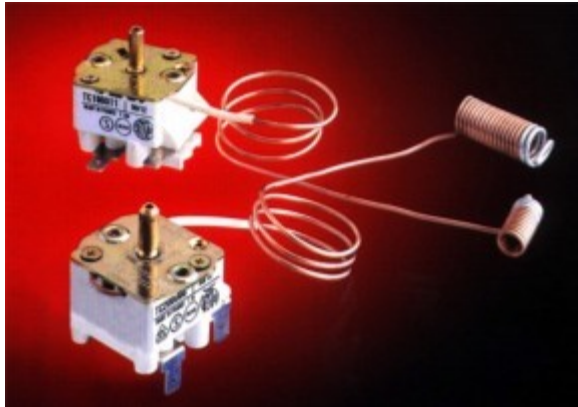

- ❖ LOW DIFFERENTIAL
- ❖ FAST RESPONSE TIME

Applications

Specially designed for electric convactor regulation.

Product & Points

These compact units operate by vapour pressure. This technique ensures high reliability, excellent precision and a very fast response time. Complete thermal stability is obtained by the particularly low differential. Ensuring both comfort and energy savings. It is designed to operate for 300,000 cycles at 11A. Remarkable quality / price ratio.